


Sun Guard Glazing

Keylite's solar control, Argon gas filled double glazing with self-cleaning coating and Low E coating lets the maximum light into the home while blocking 80% of external heat, preventing its transfer through the glass into your home, providing year round comfort.

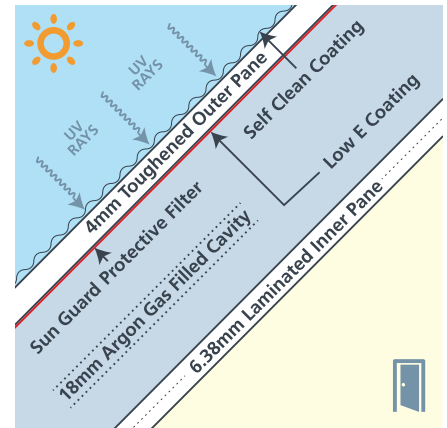

Technical Information

Glazing Results			Sun Guard [SG]
UV	Transmittance	τ_{uv}	0.01
Thermal Performance	Thermal Conductance (U-Value) [W/(m ² .K)]	U _g	1.00
Light	Transmittance for standard illuminant D65	τ_v	0.50
	Reflectance for standard illuminant D65 (*) external	ρ_v	0.11
	For standard illuminant D65 (**) internal	ρ_v	0.13
	General colour rendering index	R _a	0.92
Energy	Solar direct transmittance	τ_e	0.22
	Solar direct reflectance (*) external	ρ_e	0.40
	Solar direct reflectance (**) internal	ρ_e	0.43
	Solar direct absorption (*)	a	0.36
	Secondary internal heat transfer factor (*)	q _i	0.03
	Solar heat gain coefficient (SHGC)	g	0.24
	Shading coefficient (+g_DIN0,87)(*)	sc	0.32
Sound	Sound reduction (dB)	rw	36

Glazing Make-Up

- ▶ Self-cleaning glass on outer pane.
- ▶ 4mm toughened outer pane.
- ▶ Sun Guard protective filter.
- ▶ 18mm Argon gas filled cavity.
- ▶ 6.38mm laminated inner pane.
- ▶ Ideal safety glazing for windows below 800mm from finish floor level or windows above head height.
- ▶ Improves sound reduction, safety and a reduction in the harmful effects of UV light. Warm edge glazing unit.



Keylite Australian Distribution

New South Wales

Natural Lighting Products
Sydney Sales Office
Unit 1, 28 Vore Street
Silverwater
NSW 2128

Queensland

Natural Lighting Products
Brisbane Sales Office
Unit 12, 12-18 Ellerslie Road
Meadowbrook
Qld 4131

Victoria

Natural Lighting Products
Victorian Sales Office
Unit 13, 556-598 Princes Hwy
Noble Park
Vic 3174

Western Australia

Calidad Industries
1/40 Inspiration Drive,
Wangara
WA 6065

Customer Service:
1300 SKYLIGHT

Email:
info@keyliteskylights.com.au

keyliteskylights.com.au